

424 Rec'd PCT/PTO 30 MAY 2000

FORM PTO-1390 REV. 5-93		US DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEYS DOCKET NUMBER P00,1035
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (if known, see 37 CFR 1.5) 09 / 555425
INTERNATIONAL APPLICATION NO. PCT/EP98/07689	INTERNATIONAL FILING DATE 27 November 1998	PRIORITY DATE CLAIMED 28 November 1997	
TITLE OF INVENTION "METHOD FOR CONVERTING DIGITAL DATA IN THE RASTER OF A FIRST RESOLUTION INTO DIGITAL TARGET DATA HAVING A SECOND RESOLUTION"			
APPLICANT(S) FOR DO/EO/US Andreas HIRN			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> 1. <input checked="" type="checkbox"/> This is a FIRST submission of items concerning a filing under 35 U.S.C. 371. 2. <input type="checkbox"/> This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371. 3. This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay. 4. A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date. 5. A copy of International Application as filed (35 U.S.C. 371(c)(2)) <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> has been transmitted by the International Bureau. c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US) 6. A translation of the International Application into English (35 U.S.C. 371(c)(2)). 7. Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3)) <ol style="list-style-type: none"> a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau). b. <input type="checkbox"/> have been transmitted by the International Bureau. c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired. d. <input checked="" type="checkbox"/> have not been made and will not be made. 8. A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)). 9. An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)). 10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)). 11. to 16. below concern other document(s) or information included: <ol style="list-style-type: none"> <input checked="" type="checkbox"/> An Information Disclosure Statement under 37 C.F.R. 1.97 and 1.98; (PTO 1449, Prior Art, Search Report). 12. <input type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 C.F.R. 3.28 and 3.31 is included. (SEE ATTACHED ENVELOPE) 13. <input checked="" type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment. 14. <input type="checkbox"/> A substitute specification. 15. <input type="checkbox"/> A change of power of attorney and/or address letter. 16. <input checked="" type="checkbox"/> Other items or information: <ol style="list-style-type: none"> a. <input checked="" type="checkbox"/> Submittal of Drawings b. <input checked="" type="checkbox"/> EXPRESS MAIL #EL482398446 US, dated May 30, 2000. 			

U.S. APPLICATION NO. (if known, see 37 C.F.R. 1.53)

INTERNATIONAL APPLICATION NO.

ATTORNEY'S DOCKET NUMBER

09/555425

PCT/EP98/07689

P00,1035

17. ☒ The following fees are submitted:**BASIC NATIONAL FEE (37 C.F.R. 1.492(a)(1)-(5):**

Search Report has been prepared by the EPO or JPO \$840.00

International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) .. \$700.00

No international preliminary examination fee paid to USPTO (37 C.F.R. 1.482) but
international search fee paid to USPTO (37 C.F.R. 1.445(a)(2)) \$770.00Neither international preliminary examination fee (37 C.F.R. 1.482) nor international
search fee (37 C.F.R. 1.445(a)(2)) paid to USPTO \$1040.00International preliminary examination fee paid to USPTO (37 C.F.R. 1.482) and all
claims satisfied provisions of PCT Article 33(2)-(4) \$ 96.00**ENTER APPROPRIATE BASIC FEE AMOUNT =**

CALCULATIONS

PTO USE ONLY

\$ 840.00

Surcharge of \$130.00 for furnishing the oath or declaration later than ☐ 20 ☐ 30 months
from the earliest claimed priority date (37 C.F.R. 1.492(e)).

\$

Claims

Number Filed

Number
Extra

Rate

Total Claims

23 - 20 =

3

X \$ 18.00

\$ 54.00

Independent Claims

2 - 3 =

X \$ 78.00

\$

Multiple Dependent Claims

\$260.00 +

\$

TOTAL OF ABOVE CALCULATIONS =

\$ 894.00

Reduction by 1/2 for filing by small entity, if applicable. Verified Small Entity statement must
also be filed. (Note 37 C.F.R. 1.9, 1.27, 1.28)

\$

SUBTOTAL =

\$ 894.00

Processing fee of \$130.00 for furnishing the English translation later than ☐ 20 ☐ 30 months
from the earliest claimed priority date (37 CFR 1.492(f)).

\$

TOTAL NATIONAL FEE =

\$ 894.00

Fee for recording the enclosed assignment (37 C.F.R. 1.21(h)). The assignment must be
accompanied by an appropriate cover sheet (37 C.F.R. 3.28, 3.31). \$40.00 per property +**TOTAL FEES ENCLOSED =**

\$ 894.00

Amount to be
refunded

\$

charged

\$

a. ☒ A check in the amount of \$ 894.00 to cover the above fees is enclosed.b. ☐ Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees.
A duplicate copy of this sheet is enclosed.c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any
overpayment to Deposit Account No. 08-2290. A duplicate copy of this sheet is enclosed.NOTE: Where an appropriate time limit under 37 C.F.R. 1.494 or 1.495 has not been met, a petition to revive (37 C.F.R. 1.137(a) or (b)) must be
filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:

Hill & Simpson
A Professional Corporation
85th Floor Sears Tower
Chicago, Illinois 60606

SIGNATURE

Melvin A. Robinson

NAME

31,870
Registration Number

- 1 -

IN THE UNITED STATES ELECTED OFFICE
OF THE UNITED STATES PATENT AND TRADEMARK OFFICE
UNDER THE PATENT COOPERATION TREATY-CHAPTER II

"PRELIMINARY AMENDMENT"

5 APPLICANT: Andreas HIRN

SERIAL NO.: EXAMINER:

FILING DATE: ART UNIT:

INTERNATIONAL APPLICATION NO.: PCT/EP98/07689

INTERNATIONAL FILING DATE: 27 November 1998

10 INVENTION: METHOD FOR CONVERTING DIGITAL DATA IN
THE RASTER OF A FIRST RESOLUTION INTO
DIGITAL TARGET DATA HAVING A SECOND
RESOLUTION

Hon. Assistant Commissioner for Patents
15 Box PCT
Washington D.C. 20231

SIR:

Amend the above-identified international application before entry into the
national stage before the U.S. Patent & Trademark Office under 35 U.S.C. §371
20 as follows:

IN THE SPECIFICATION

On page 1, before the title, insert --

SPECIFICATION

TITLE--;

after the title, insert --

BACKGROUND OF THE INVENTION

Field of the Invention--;

after line 6, insert --

5 Description of the Related Art--.

On substitute page 4, after line 14, insert --

SUMMARY OF THE INVENTION--.

On page 9, after line 5, insert --

BRIEF DESCRIPTION OF THE DRAWINGS--.

10 On page 10, after line 3, insert --

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS--.

On page 31, after line 25, add the following new paragraph --

15 After other modifications and changes may be suggested by those skilled in the art, it is the intention of the inventors to embody within the patent warranted hereon all changes and modifications as reasonably and properly come within the scope of their contribution to the art.--.

Cancel pages 32-34.

IN THE CLAIMS

20 On substitute page , line 1, change "Patent Claims" to --I Claim:--.

Amend claim 1 as follows:

1. (Amended) A method [Method] for converting digital source data referring to source pixels in the raster of a first resolution into digital target data in

the raster of a second resolution, [whereby] comprising the steps of:

(a) scaling the digital source data [are scaled] by at least one scaling factor [(sx, sy),];

(b) allocating a target image matrix to each of the digital source datum
5 [(1, 7, 7', 23, 33, 42)] has a target image matrix (26, 27, 28, 29, 53, 54, 55, 56)
allocated to it] on a [the] basis of a surround window [(52a, 52b, 52c, 52d)]
surrounding the source pixel and determining the digital target data [are
determined] from neighboring target image matrices [(26, 27, 28, 29, 53, 54, 55,
56)] such that each target pixel is directly formed from a source pixel taking the
10 surroundings thereof into consideration,

(c) using each digital source datum [is employed] for smoothing the
target data to be determined from all neighboring source data,
and

(d) implementing [the] scaling and [the] smoothing [are implemented]
15 such in a common processing step that

(d1) the target data are smoothed in the raster [(23', 23'')] of the source
data [(1, 7, 7', 23, 33, 42)].

2.(Amended) A method [Method] according to claim 1, further
comprising the step of: [whereby]
20 superimposing neighboring target image matrices [(26, 27, 28, 29, 53, 54, 55, 56)]
[are superimposed] on one another for determining the target data or are
joined without overlap.

3.(Amended) A method [Method] for converting digital source data in a
[the] raster of a first resolution into digital target data in a [the] raster of a second
25 resolution, [whereby] comprising the steps of:

(a) scaling and smoothing the digital source data [are scaled] by a scaling factor [(sx, sy) and are smoothed,];

(b1) selecting a scaling rule [is prescribed] from a plurality of selectable scaling rules,

5 (b2) selecting a smoothing rule [is prescribed] from a plurality of smoothing rules,

(c) forming a single scaling and smoothing rule [is formed] from the selected scaling rule and the selected smoothing rule, both a smoothing of the digital target data in the raster [(23', 23'')] of the digital source data [(1, 7, 7', 23, 33, 42)] as well as a scaling ensuing in respectively one processing step with said single scaling and smoothing rule during [the] formation of the target data,

10 (c1) allocating a target image matrix to each source datum [(1, 7, 7', 23, 33, 42) has a target image matrix (26, 27, 28, 29, 53, 54, 55, 56) allocated to it] on a [the] basis of a surround window [(52a, 52b, 52c, 52d)] surrounding the digital source pixel and determining the digital target data [are determined] from neighboring target image matrices [(26, 27, 28, 29, 53, 54, 55, 56)] such that each target pixel is directly formed from a source pixel taking the surroundings thereof into consideration,

15 (d) using each source datum [is employed] for smoothing the target data to be determined from all neighboring source data.

4.(Amended) A method [Method] according to claim 3, further comprising the step of: [whereby] selecting the scaling rule [is prescribed] from a plurality of scaling rules.

25 5.(Amended) A method [Method] according to claim 3 [or claim 4], further comprising the step of: [whereby]

selecting the smoothing rule [is prescribed] from a plurality of smoothing rules.

6.(Amended) A method [Method] according to claim [one of the claims] 4 [or 5], wherein [whereby] the selecting [prescription] of the scaling rule [and/or of the smoothing rule] ensues on a [the] basis of a print job.

5 7.(Amended) A method [Method] according to claim 6, further comprising the step of: [whereby] using different smoothing rules [are employed] region-by-region within the print job.

10 8.(Amended) A method [Method] according to claim [one of the claims] 1 [through 7], wherein [whereby] the scaling factor [(sx, sy)] has a fractional value.

9.(Amended) A method [Method] according to claim [one of the claims] 1 [through 8], wherein [whereby] the scaling and the smoothing ensue in a common work step.

15 10.(Amended) A method [Method] according to claim 1 [one of the preceding claims], wherein [whereby] the scaling and smoothing steps include generating [ensue in that] a respective index [(49)] allocated to the target image matrix [(26, 27, 28, 29, 53, 54, 55, 56) is generated] from the source data [(1, 7, 7', 23, 42)] individually pixel-by-pixel, the target data [(8, 10, 24, 30, 47)] being
20 determined with said index.

11.(Amended) A method [Method] according to claim 10, further comprising the step of: [characterized in that]
using the index [(49) is employed] for addressing a look-up table [(51)] that contains the target data.

5 12.(Amended) A method [Method] according to claim 10, further comprising the step of: [whereby]
using the index as [(49) is employed in the form of] an index signal for driving an electronic circuit [(51)] that forms the target data [(8, 10, 24, 30, 47)] from the index signals.

10 13.(Amended) A method [Method] according to claim [one of the claims] 10 [through 12], further comprising the steps of: [whereby]
storing the source data [(33) are stored] byte-by-byte in a shift register [(37)],
shifting [whereby] an interrelated group of data [(36, 36')] are respectively shifted
15 the index [(49)] is formed from bits of the shift register [(37)] lying next to one another after the shifting of all data of the group.

14.(Amended) A method [Method] according to claim 1 [one of the preceding claims], wherein [whereby] the shift register [(37)] is filled according to the following rules with every processing clock:

- 20 (a) R0 through R(A-1) remain unaffected and
(b) $R(i+A) = q(i/Qy, Qy - 1 - (i\%Qy))$ and
 $R(i+A) = q(i/Qy, i\%Qy)$,

whereby the following applies:

Ri: value of the ith register bit

Qx: window width in x-direction

Qy: window width in x-direction

q(k,l): value of the source pixel having the position (k, l)

/: integer division

5 %: modulo division and

$A = Qy * (Qx - 1).$

10 15.(Amended) A method [Method] according to claim 1 [one of the preceding claims], wherein [whereby] pixel data belonging to images are processed as the digital source data [(1, 7, 7', 23, 33, 42)].

15 16.(Amended) A method [Method] according to claim 1 [one of the preceding claims], further comprising the steps of: [whereby] processing excerpts of the image having l x m source pixels [are respectively processed] in common as a window; [in that] forming target image matrices each respectively having n x p target pixels [are formed] from each source pixel window; and [in that] depositing the target pixels of neighboring target pixel matrices [are deposited] in a memory next to one another or overlapped.

20 17.(Amended) A method [Method] according to claim 16, wherein [whereby] neighboring target image matrices are overlapped with an OR-operation.

 18.(Amended) A method [Method] according to claim 17, wherein [whereby] the source pixel windows each respectively comprise 3 x 3 pixels for scaling factors $Sfx = Sfy = 2.5$; [in that] and further comprising the steps of:

forming exactly one target image matrix having 3 x 3 target pixels [is formed]
from each source pixel window; and [in that]
forming exactly 5 x 5 target pixels [are formed] from respectively four target
image matrices by an OR-operation.

5 19.(Amended) A method [Method] according to claim 1 [one of the
preceding claims], further comprising the step of: [whereby]
allocating a grayscale value [is allocated] to each source pixel.

 20. (Amended) A method [Method] according to claim 19, wherein at
least one of [whereby] a scaling and [/or] smoothing ensues in the grayscale value
10 raster.

 21.(Amended) A method [Method] according to claim 1 [one of the
preceding claims], further comprising the step of: [whereby]
allocating a color value [is allocated] to each source pixel.

 22.(Amended) A method [Method] according to claim 19, wherein at
15 least one of [whereby] a scaling and [/or] smoothing ensues in the color value
raster.

Add new claim 23 as follows:

 23. A method according to claim 5, wherein the selecting of the smoothing
rule ensues on a basis of a print job.


20

REMARKS

The foregoing amendments to the specification and claims under Article 41 of the Patent Cooperation Treaty place the application into a form for prosecution before the U.S. Patent and Trademark Office under 35 U.S.C. §371.

5 Accordingly, entry of these amendments before examination on the merits is hereby requested.

Respectfully submitted,



Melvin A. Robinson (reg. no. 31,870)
Hill & Simpson
A Professional Corporation
85th Floor Sears Tower
Chicago, Illinois 60606
Telephone: 312-876-0200 ext. 3044

ATTORNEY FOR APPLICANT

**METHOD FOR CONVERTING DIGITAL DATA IN THE RASTER OF A
FIRST RESOLUTION INTO DIGITAL TARGET DATA HAVING A
SECOND RESOLUTION**

5 The invention is directed to a method for converting digital source data in the raster of a first resolution into digital target data having a second resolution according to the preamble of patent claim 1.

In digital data processing, it is often necessary to convert digital image data that are present in the raster of a first resolution into target data having a second resolution. Each picture element, i.e. a point in the raster allocated to the digital value, is thereby referred to as pixel. Without gray levels, thus, a pixel corresponds to one bit. The topical resolution is thereby indicated in picture elements per inch (dots per inch, dpi). As known, one inch corresponds to 25.6 mm. The second resolution (target resolution) is usually higher than the first (source resolution). The target image in the second resolution can also contain more gray scale values per pixel than
10 the source image instead of or in addition to the higher topical resolution.

For example, it often occurs in digital printing technology that image data are supplied by a computer in a first raster, for example in a 240 dpi raster, but are to be reproduced by a printer in a different raster, for example in a 600 dpi raster. Particularly when expanding an existing EDP system by a modern printer, it occurs
20 that print jobs that were produced earlier comprise, for example, only masters in 240 dpi resolution. When the user wishes to use his new printer with, for example, a resolution of 600 dpi, then the print data must be correspondingly converted. The conversion should thereby ensue automatically without requiring inputs by the user.

Since half the pixels cannot be represented in playback units having
25 discrete presentation levels such as LCD picture screens or digital printers, specific rules must be erected for conversions by factors of the resolution that are not whole-numbered.

The conversion can then ensue such that each value of the first raster is multiplied by a scaling factor SF that is prescribed by the ratio of the two resolution values of the rasters, that, thus, for example, the SF-fold set of identical values in the
30

second raster is generated from a value in the first raster, whereby the following applies:

$$SF_i = \frac{\text{resolution of the second raster in direction } i}{\text{resolution of the first raster in direction } i} \quad (\text{Equation } 1)$$

Although the data are transformed into the target raster with such a scaling procedure, the playback quality is thereby not improved.

On the other hand, the conversion of data into a raster having higher resolution in fact enables the improvement of the playback quality in that, for example, contours are more finely drawn. It is usually necessary to smooth the data for such a conversion. In known smoothing methods, smoothing parameters usually enter into the smoothing process in the form of a matrix or, respectively, of a window, whereby the weighting of neighboring picture elements of a point to be smoothed is prescribed by the values of the matrix. Given $SF_x = SF_y$, such windows are 3 x 3 windows or 5 x 5 windows.

A method for scaling and smoothing image data is disclosed by DE 195 06 792 A1. In this method, a plurality of sets of pixel patterns or, respectively, Boolean calculating operations allocated to them are provided, with reference whereto the conversion ensues. For conversion, a matrix of source image data having, for example, 7 x 7 picture elements is subjected to the basic calculating operations and the target image data are acquired therefrom. When scaling the image data "up" ($SF > 1$), a respective group of target pixels is allocated to a group of source pixels. The calculating operations are configured such that the same number of high-resolution pixels are removed as added on average in the conversion. What is thereby achieved is that the degree of blackening of an overall image is essentially preserved.

What is disadvantageous about this method is that the conversion ensues only in groups with respect to the source pixels. Given, in particular, a scaling factor that is not whole-numbered (a broken scaling factor), one of the target pixels (Φ) can then only be optionally allocated to a cluster of neighboring target pixels, i.e. relatively unmotivated, and cannot be unambiguously allocated to a source pixel. In addition, the allocation must be defined in advance in corresponding method rules.

A method for converting digital image data from a first raster into a second raster that is suitable for non-whole-numbered scaling factors is also disclosed by German Patent Application 197 13 079.8. This method likewise works region-oriented. A target region is thereby allocated to each source region, whereby the two regions having the same position in the overall image. Boolean calculating rules are prescribed within the target region, the conversion ensuing in conformity with these rules.

Another procedure for scaling and smoothing image data is disclosed by EP 506 379 B1 as well as by US 5,270,836. Two steps for scaling and smoothing are provided in this procedure. As schematically shown in Figure 1, a source image 1 that is present in a source raster is scaled in a first step 2 given this procedure, as a result whereof an intermediate image 3 arises in the target raster. The smoothing in the target raster is implemented on the basis of this intermediate image in the second step 4, as a result whereof the target 5 arises.

What is disadvantageous about the above-described procedure is that a plurality of data in the target raster must be respectively taken into consideration for the smoothing. Due to the relatively great number of memory accesses and calculating operations that are thereby required, the outlay connected therewith is relatively high and is therefore hardly suited for applications such as high-performance printing systems wherein the speed of the conversion is crucial. A realization of the method on the basis of software thus likewise seems hardly possible.

A scaling and smoothing of transmission data can also be necessary in the field of telefax transmission when the data, for example, are received in a first resolution but are stored, forwarded or are to be printed out in a different resolution. A corresponding method for this application is disclosed, for example, by US 5,394,485 A.

Another method for converting image data is disclosed by DE 42 06 277 A1. Only a raster conversion but no smoothing of the image data ensues given this method. EP 708 415 A2 likewise discloses a method for converting image data that, however, is only suitable for whole-numbered scaling factors. EP 0 006 351 A1

discloses an image processing system that works with look-up tables. US 5,657,430 A discloses a method for converting vector fonts onto gray scale bit maps.

US-A-5,646,741 discloses a method and an apparatus wherein image signals are scaled and smoothed. A check according to predetermined criteria is thereby carried out in the source region to see whether a smoothing should be implemented and the source image signals potentially smoothed. The smoothed image signals are smoothed thereafter.

WO-A-96/16380 discloses a system and a method for the interpolation of image signals. A rule is thereby respectively selected from a plurality of interpolation rules. The source image signals are then processed in a plurality of successive steps. In a first step, the image signals are interpolated line-by-line on the basis of a selected, line-related rule. In a second step, the image signals are then interpolated column-by-column on the basis of a second, column-related rule. Finally, the line image signals and the column image signals are compiled in pages by a formatting unit.

An object of the method is to specify a method for converting digital image data from a first raster into a second raster that leads to a high processing speed and that implements both a scaling as well as a smoothing of the image data.

This object is achieved by the invention recited in patent claims 1 and 3. Advantageous embodiments of the invention derive from the subclaims.

According to a first aspect of the invention, the data are scaled by at least one scaling factor and a target image matrix is allocated to each source datum by individual pixels, i.e.-pixel-individually with respect to the source pixels, on the basis of a surround window surrounding the source pixel. The target data are determined from neighboring target image matrices, whereby the data are smoothed in the raster of the source data. Each source datum is thus employed for smoothing all neighboring source data.

According to the first aspect of the invention, the smoothing of the data is implemented in the raster of the source data and not in the target raster. A significantly faster data processing given two-dimensional image data is thus possible than given comparable methods that implement the smoothing in the target raster because the data set onto which the smoothing function is applied is significantly

scaling of an image by a factor greater than one in fact increases the plurality of pixels to be smoothed; the informational content of the bit map on which the image is based, however, remains unmodified. Tests have shown that a smoothing with rules that erected in the target raster does not yield different results than when corresponding rules for smoothing are already erected on the basis of the data in the source raster.

It is also perceived that the time required for the smoothing - in a first approximation (i.e., without taking the image edges into consideration) - is directly proportional to the size of the image, and the processing of the data in the source raster can therefore ensue faster than the processing of the data in the target raster.

Proceeding from the known prior art, in particular, it was perceived that a general smoothing method in the target region is based on the existence of all pixel combinations. Since, however, the pixels were highly scaled, there are only a limited plurality of variation possibilities. The informational content of the pixels is not increased by scaling-up. The time required for processing the data can be reduced by the square of the scaling factor as a result of the inventive smoothing of the image data in the source raster compared to methods that smooth in the target raster.

A smoothing with the data of the source image as basis also enables a smaller size of the recognition matrix. Given a scaling factor of 2, a recognition matrix of 3×3 in the source region, for example, achieves the same quality as a 5×5 recognition matrix that is applied in the target region. The result thereof is that only $3 \times 3 = 9$ pixels need be taken into consideration for the recognition in the source region instead of $5 \times 5 = 25$ pixels in the target region. The processing speed of the invention method given direct logical evaluation (in hardware or software) is thus increased in two respects: first, fewer data are to be interpreted in the source raster than in the target raster; second, the size of the smoothing window can be reduced in the source raster. The processing speed is then higher by a factor of up to $25/9 \times SF_x \times SF_y$ than in conventional methods. The logical outlay, for example for gate functions, is reduced by this factor. A table having 512 entries is needed for a 3×3 matrix given a realization with look-up tables, which are often utilized in software solutions for performance-enhancement because the bit-by-bit logical interpretation is thereby eliminated and the result is directly obtained from the table. In contrast, this

table must have a size of 33554432 entries (32 MB) given a 5 x 5 matrix. A table of this size is no longer acceptable in practice.

The invention also enables both the function of the smoothing as well as that of the scaling to be implemented in a single step, in that the overall method is implemented in the raster of the source data. The method can thereby be implemented independently of the size of the respective scaling factor. The scaling factor can be both whole-numbered as well as fractional.

In a second aspect of the invention, digital source data in the raster of a first resolution are scaled by a scaling factor and smoothed into digital target data in the raster of a second resolution. A scaling rule is thereby prescribed and a specific smoothing rule is prescribed from a plurality of smoothing rules. The two prescribed rules are then merged such to form a combined scaling and smoothing rule that the smoothing ensues in the raster of the source data, whereby each source datum is employed for smoothing a plurality of neighboring source data. The scaling factor is, in particular, not a whole number and can be presented by a fraction of whole numbers.

A high degree of flexibility in the processing of image data is achieved by the second aspect of the invention. Particularly given a conversion of the method with a software program, a plurality of smoothing and/or scaling methods can thereby be freely combined with one another, and one can react very flexibly to the greatest variety of print data and printer resolutions when printing images. Individual (job-specific) scaling and/or smoothing rules can thereby already be prescribed or selected either in the print job or in the printer device, for example by an operator.

In a third aspect of the invention, it is not only binary data (black-and-white) that are processed; rather, grayscale values or color values covering a plurality of bits or bytes are processed per picture element. It is thereby possible, on the one hand, to implement a "grayscale conversion" wherein the raster refers to gray scales and, thus, a conversion from a first grayscale raster into a second grayscale raster is undertaken per picture element, for example 4-bit grayscale values corresponding to 16 gray scales onto 6-bit grayscale values corresponding to 64 gray scales are scaled up. A grayscale smoothing can thereby also ensue in that more finely graduated

grayscale transitions are generated between the picture elements in the target space. On the other hand, it is thereby also possible to convert the picture elements in the location space (i.e., in the dots per inch raster) affected with grayscale values into a finer location space raster upon retention of the grayscale resolution. Analogous to these gray scale conversion versions, color scale conversions, for example a scaling-up from a 32 color bit raster into a more highly resolved 48 color bit raster, can also
 5 enue. A color smoothing analogous to the grayscale smoothing can also be implemented as a result thereof.

The scalings and smoothings in the location space, in the grayscale space
 10 and in the color space can thereby be arbitrarily combined with one another.

In a fourth aspect of the invention, the processing of the data ensues byte-oriented. A binary information can thereby respectively be allocated to a plurality of picture elements and the data can be processed parallel. However, gray scales and/or color values can also be allocated to the picture elements (pixels), these in turn
 15 comprising a plurality of bits or bytes per pixel. A byte-by-byte processing has a positive effect on the processing speed because digital electronic components, particularly in the field of information processing, likewise internally process the data byte-by-byte and because this byte format is a generally standard memory format.

With every processing clock, the data are thereby shifted in a register by a
 20 specific plurality of positions dependent on the height of the smoothing window; after storing a corresponding plurality of bytes (for example, 3 bytes for a processing of 3 lines with 8 pixels each on which a 3 x 3 smoothing window should respectively act), neighboring data represent an index. This index can be directly employed for addressing a corresponding smoothing matrix (for example, 3 x 3), whereby the
 25 addressing acts either as input signal of a hardware circuit or acts directly on a look-up table within a computer software. The two-dimensional objective of processing image data is thereby converted into a one-dimensional task.

In a preferred exemplary embodiment, a shift register having respectively
 n bytes per line is filled per processing clock according to the following rules:

30 R_0 through $R_{(A-1)}$ remain unaffected (Rule 1) and

$$R_{(i+A)} = q(i/Q_y, Q_y - 1 - (i \% Q_y)) \text{ or}$$

$$R_{(i+A)} = q(i/Q_x, i\%Q_x) \quad (\text{Rule 2}),$$

whereby the following apply:

R_i : value of the i^{th} register pixel;

Q_x : window width in x-direction

5 Q_y : window width in y-direction

$q(k,1)$: value of the source pixel with the position $(k,1)$

$/:$ integer division

$\%:$ modulo division and

10 $A = W \times (Q_y \times (Q_x - 1))$. The shift register thereby has a width $B = Q_y \times W \times ((8n/W) - 1 + Q_x)$, whereby $8n/W$ is whole-numbered, with

W : value of a pixel, i.e. bits per pixel (binary, grayscale value, color value)

B : width of the shift register in bits

for $W = 1$ (binary data), $B = Q_y \times (8n - 1 + Q_x)$ is obtained.

It has been shown that the inventive method - particularly given a
 15 realization in the form of a software program on a computer - runs significantly faster than comparable methods that first implement a scaling, deposit the result in an intermediate memory and only then implement the smoothing at the intermediately stored data, i.e. in the target raster. What is advantageous given a conversion with software is that the switching can ensue highly suited to need within a print job -
 20 when a conversion is required, this ensues with the corresponding modules of the conversion program. When no conversion is required, then the data are forwarded without having been processed by the conversion program. The flexibility can thus be enhanced to such an extent that different resolutions can even be processed within one document to be printed out, i.e. within one page. Whereas, for example, text having a
 25 resolution of 300 dpi has a good effect, it is usually expedient to select a resolution of 600 dpi or higher in the reproduction of images.

In the smoothing, it can be necessary to distinguish between image information and text information and to respectively undertake different or, respectively, no smoothing, for example in order to avoid Moiré effects. When the
 30 invention is applied in a software, then the advantage can be achieved that no outlay is required for distinguishing between texts and images within a print job. This

information is often already contained in the print job in the form of different object identifiers and can be employed for setting the smoothing rules.

The scaling and smoothing can ensue in a common step with a look-up table that contains data for both procedures. The source data are thereby preferably
5 directly employed for addressing the look-up table.

Further advantages and effects of the invention become clear on the basis of the following description that is supplemented by Figures.

Shown are:

- Fig. 1 a procedure of the prior art;
- 10 Fig. 2 a mathematical model on which the invention is based;
- Fig. 3 various combination possibilities in an image data conversion of 2 x 2 source pixels;
- Fig. 4 an example of an image data conversion;
- Fig. 5 a further example of an image data conversion;
- 15 Fig. 6 various presentations of a slanting line in an image raster;
- Fig. 7 a smoothing window in an image raster;
- Fig. 8 a scaling procedure by a scaling factor of 2;
- Fig. 9 a smoothing procedure with a 5 x 5 matrix;
- Fig. 10 a scaling by the factor 2.5;
- 20 Fig. 11 a sketch underlying a smoothing procedure;
- Fig. 12 various windows on which a smoothing is based;
- Fig. 13 the schematic diagram of a smoothing result;
- Fig. 14 an illustration of the superimposition of data;
- Fig. 15 the processing of image data with a smoothing window;
- 25 Fig. 16 the deposit of two-dimensional image data in a one-dimensional register;
- Fig. 17 the conversion of a plurality of pixels of a source line into register pixels;
- Fig. 18 a data processing process, whereby scaled and smoothed target image data are acquired directly from the source image data;
- Fig. 19 a conversion of digital image data into index bits;
- 30 Fig. 20 a hardware arrangement for the conversion of digital image data;
- Fig. 21 a software concept for the conversion of digital image data;

Fig. 22 a version for compiling target image matrices without superimposition of source pixels; and

Fig. 23 the result of the compilation of Figure 22.

A fundamental investigation and a mathematical modeling of the scaling
 5 ensue first with reference to Figure 2. The observations about the scaling are based on the discrete i - j coordinate system 6 shown in Figure 2a, whereby i references the pixel index in x -direction and j references the pixel index in y -direction.

By way of example, Figure 2b shows a scaling by a scaling factor 2 as occurs given a conversion from a 300 dpi source raster onto a 600 dpi target raster.

10 Each source pixel 7 is thereby two-dimensionally treated, i.e. doubled in each of the directions x and y . The raster spacings are twice as great in the source raster as in the target raster. One pixel 7 in the source region becomes four pixels in the target region. As shown in Figure 2c, the scaling factor can also be different in the x - and y -directions, for example have the value 2 in x -direction and the value 3 in y -direction.

15 **Non-Whole-Numbered Scaling Factor**

When a scaling factor that is not a whole number is to form the basis, for example the scaling factor 2.5 corresponding to a conversion from a 240 dpi source raster onto a 600 dpi target raster, then one proceeds analogous to whole-numbered scaling factors. This procedure is schematically shown in Figure 2d. Theoretically,
 20 2.5 x 2.5 pixels 8 in the target region derive from one pixel 7 in the source region.

Since half the pixels can not be digitally presented, a group of pixels is initially considered as starting basis for the scaling procedure, whereby a solution for the following task must be found:

“What is sought is the smallest whole number of source pixels
 25 for each coordinate direction that leads to a whole number of target pixels in the same direction in the scaling.”

For a conversion of 240 dpi onto 600 dpi, this condition is met, for example, with two source pixels and 5 target pixels. When one proceeds on the basis of a 2 x 2 pixel square in the source region, then one obtains a 5 x 5 pixel square in
 30 the target region given the scaling factor 2.5.

16 combinations that must be imaged onto the target region derive from the 2 x 2 pixels in the source region. These 16 combinations of possible source squares 9 in the source region are shown in Figure 9, whereby black pixels stand for the binary information "1". Respectively three possible target squares 10 in the 5 x 5 target matrix onto which these source data can be imaged are indicated to the right next to the 2 x 2 pixel squares of the source data.

An example for a conversion having a scaling factor that is not a whole number is indicated below (Figures 10 through 13).

Mathematical Model for the Scaling Method

Given scaling factors that are whole numbers, one proceeds according to the following equation in a first scaling method:

$$sc_{(i,j)} = q_{\left(\frac{i}{sx}, \frac{j}{sy}\right)} \quad (\text{Equation } 2),$$

with:

$sc_{(i,j)}$ value of the target pixel (0 or 1) to be calculated

i,j coordinates in the target raster

$q_{(a,b)}$ value of the corresponding source pixel

sx scaling factor in x-direction

sy scaling factor in y-direction

A source pixel is imaged onto a rectangle having $sx * sy$ target pixels, i.e. a plurality of target pixels are derived from one source pixel.

The target pixels contain the same value (9/1 given binary data, gray scales or, respectively, color value given non-binary data) as the source pixel. Given scaling factors that are not a whole number, the scaling factors enter into Equation 2 as a fraction:

$$sc_{(i,j)} = q_{\left(\frac{ix}{sx_N}, \frac{jy}{sy_N}\right)} \quad (\text{Equation } 3)$$

with:

sx_N denominator of the scaling factor in x-direction

sx_z numerator of the scaling factor in x-direction
 sy_N denominator of the scaling factor in x-direction
 sy_z numerator of the scaling factor in y-direction

Figure 4 shows a corresponding example with $sx = 1.5 = 3/2$ and $sy = 2.5 = 5/2$, whereby four source pixels 7 are converted into 15 target pixels 8.

Scaling with scaling factors that are not whole numbers according to Equation 3 yields asymmetrical results. As in the case of whole-numbered scaling factors, each target pixel is derived from one source pixel. The plurality of target pixels that are derived from a specific source pixel, however, is thereby dependent on the location of the target pixel and is not always the same; an asymmetry therefore arises.

An improvement compared to the first scaling method is obtained when a rectangle of $sx_N * sy_N$ source pixels are combined to a block 7' that can be represented in the target region without sub-pixels. Such rectangles are scaled block-by-block into corresponding target blocks 8' with $sx_z \times sy_z$, in that each target pixel is derived from the source pixels from the source block via a logical equation. Each target pixel can then be dependent on a plurality or, respectively, on from one through all source pixels. The conversion described for Figure 4 could then look the way it is shown in Figure 5.

The following logical equations are thereby applied:

$sc(0,0) = sc(0,1) = q(0,0)$
 $sc(0,3) = sc(0,4) = q(0,1)$
 $Ssc(2,0) = sc(2,1) = q(1,0)$
 $sc(2,3) = sc(2,4) = q(1,1)$
 $sc(1,0) = q(0,0) \&\& !q(1,1) \mid (q(0,1) \&\& !q(1,0))$
 $sc(1,4) = (q(1,0) \&\& !q(0,1) \mid (q(1,1) \&\& !q(0,0)))$
 $sc(0,2) = q(0,0) \mid q(0,1)$
 $sc(2,2) = q(1,0) \mid q(1,1)$
 $sc(1,1) = (q(0,0) \&\& q(1,0)) \mid (q(0,0) \&\& !q(1,1)) \mid$
 $(q(1,0) \&\& q(0,1))$
 $sc(1,3) = (q(0,1) \&\& q(1,1)) \mid (q(0,1) \&\& q(1,0)) \mid$

$$(q(1,1) \&\& q(0,0))$$

$$sc(1,2) = (q(0,0) \&\& q(1,1)) \mid (q(1,0) \&\& q(0,1))$$

One equation exists for each target pixel; there are sxZ & syZ equations per block that contain dependencies of $sxN * syN$ source pixels. In the general form,

5 this then looks as follows:

$$sc_{(i,j)} = fscal(i \% sxZ, j \% syZ) (q_{(i * \frac{sxN}{sxZ} - (i \% sxN) + 0, j * \frac{syN}{syZ} - (j \% syN) + 0)}, \dots, \\ q_{(i * \frac{sxN}{sxZ} - (i \% sxN) + (sxN - 1), j * \frac{syN}{syZ} - (j \% syN) + 0)}, \dots, \\ \dots, \\ q_{(i * \frac{sxN}{sxZ} - (i \% sxN) + 0, j * \frac{syN}{syZ} - (j \% syN) + (syN - 1))}, \dots, \\ q_{(i * \frac{sxN}{sxZ} - (i \% sxN) + (sxN - 1), j * \frac{syN}{syZ} - (j \% syN) + (syN - 1))})$$

(Equation 4), whereby the following is again valid:

- := integer division

% := modulo division

10 Equation 4 describes a general scaling method which covers the two above-described scaling methods.

There are ($sxZ * syZ$) logical equations with respectively up to ($sxN * syN$) dependencies. It can occur at the top and right-hand edges that the source blocks are not completely occupied with source pixels; the width and height of the source image is arbitrary and is not necessarily a multiple of the source blocks. Elements that do not exist must be assumed to of not been set, usually white (0).

15 Mathematical Modeling of the Edge Smoothing in the Target Raster

In an edge smoothing, each pixel is observed in its environment. To that end, a quadratic smoothing window (smoothing matrix) with an uneven pixel edge length is shifted over all pixels to be smooth. Dependent on the environment and its own pixel value (the recognized structure in the smoothing window), a decision is made as to whether the pixel should be black or white given binary data; the resulting value is determined given grayscale values or color values. Only pixel values are

usually shifted in sum over all pixels; the sum of the pixels that are set or, respectively, not set with the digital values "0" or, respectively, "1" or, respectively, the average grayscale value or color value remains nearly the same.

5 According to the method disclosed by DE 195 06 792 A1, the smoothing ensues by attaching and removing pixels; the structures to be recognized and to be corrected are also referred to as rules. The size of the environment to be considered (size of the smoothing window, of the smoothing matrix) is dependent on the prescription as to which structures are to be recognized and smoothed.

10 The environment of a pixel is described below in the form of an order of the neighbors to be considered. Neighbors of the first order are the direct neighbors, i.e. all pixels that share at least one corner with the pixel to be investigated. Overall, this yields the investigated pixel and eight neighbors. Neighbors of the second order are all pixels that share at least one corner with the neighbors of the first order, etc.

In tabular form, this yields the following situation:

	Structure to be recognized	Order	Size of the Smoothing Window	Pixels to be Considered
	45° lines (1-1)	1	3 x 3	9
	(1-2)/(2-1) - lines	2	5 x 5	25
	(1-3)/(3-1) - lines	3	7 x 7	49
5	(1-4)/(4-1) - lines	4	9 x 9	81

(Table 1).

What one then obtains for a smoothing with a 5 x 5 recognition matrix is

$$\begin{aligned}
 sm_{(i,j)} = fsmooth(&P_{(i-2,j-2)}, P_{(i-1,j-2)}, P_{(i,j-2)}, P_{(i+1,j-2)}, P_{(i+2,j-2)}, \\
 &P_{(i-2,j-1)}, P_{(i-1,j-1)}, P_{(i,j-1)}, P_{(i+1,j-1)}, P_{(i+2,j-1)}, \\
 &P_{(i-2,j)}, P_{(i-1,j)}, P_{(i,j)}, P_{(i+1,j)}, P_{(i+2,j)}, \\
 &P_{(i-2,j+1)}, P_{(i-1,j+1)}, P_{(i,j+1)}, P_{(i+1,j+1)}, P_{(i+2,j+1)}, \\
 &P_{(i-2,j+2)}, P_{(i-1,j+2)}, P_{(i,j+2)}, P_{(i+1,j+2)}, P_{(i+2,j+2)})
 \end{aligned}$$

(Equation 5).

The general equation for the smoothing in the target raster reads:

$$\begin{aligned}
 sm_{(i,j)} = fsmooth(&p_{(i-\frac{G}{2}, j-\frac{G}{2})}, \dots, p_{(i+\frac{G}{2}, j-\frac{G}{2})}, \\
 &\dots, p_{(i,j)}, \\
 &p_{(i-\frac{G}{2}, j+\frac{G}{2})}, \dots, p_{(i+\frac{G}{2}, j+\frac{G}{2})})
 \end{aligned}$$

(Equation 6) whereby the following applies:

- sm(i,j) value of the pixel to be investigated after the smoothing
- p value of a pixel from the smoothing window
- G size of the smoothing window
- fsmooth logical equation with G X G dependencies that describes the smoothing,
- and
- integer division.

The above-described smoothing procedure is illustrated below on the basis of the example with binary data shown in Figure 6. A 45° line is thereby smoothed.

First, the presence of a structure to be smoothed must be investigated. To that end, a recognition matrix of 3 x 3 (or 5 x 5, 7 x 7, ...) Pixels is shifted across the

image. When a structure to be smooth is recognized, then the value of the pixel in the center of this matrix is defined for the target region. When, by contrast, no structure to be smooth is present, then the pixel value remains unmodified. The conditions for the existence of a structure to be smoothed are referred to as rules.

One first proceeds in line direction from left to right within the image illustrated in Figure 6a. White corner pixels 11 (empty corners at white-to-black transitions) are thereby set to "black" at the structures recognized by the rules, as a result whereof the image shown in Figure 6b arises. Pixels to which none of the rules are applied remain unmodified. Black corner pixels 12 at the structures established by the rules (given white-to-black transitions) are then set to "white" from right to left, as a result whereof the image shown in Figure 6c arises.

The same result (Figure 6c) can be achieved when, given the image excerpt shown in Figure 6a, corner pixels at black-to-white transitions are removed from left to right. This latter method is single-stage because adding and removing are implemented in one work step.

The following rules are used for smoothing digital image data:

- recognizing and smoothing 45° lines (2-2 lines, two units in x-direction, two in y-direction)
- retaining right-angled corners, not smoothing
- recognizing and smoothing 2-4 lines
- potential recognition and smoothing of 2-x lines dependent on the size of the recognition matrix (x is an even number > 2).

When all rules are taken into consideration for the four initial directions and for the mirroring (2-4 lines are then equivalent to 4-2 lines), then a total of eight sub-rules derive.

Edge Problems when Smoothing

Not all pixels at the edges of the image to be smoothed (top, bottom, left, right) are available for the recognition matrix. Pixels that do not exist (for example, the pixel 13 to the left next to the image excerpt 14 shown in Figure 7) are considered not set, i.e. as white.

Combining Scaling and Smoothing to One Procedure that Works in the Source Raster

The two methods for scaling and for edge smoothing should now be combined. To that end, the smoothing equation 6 is inserted into one of the scaling

5

equations 2 or 3. Proceeding from a scaling with whole-numbered scaling factors according to equation 2, one obtains the following:

$$sm_{(i,j)} = fsmooth(q_{(\frac{i-\frac{G}{2}}{sx}, \frac{j-\frac{G}{2}}{sy})}, \dots, q_{(\frac{i+\frac{G}{2}}{sx}, \frac{j+\frac{G}{2}}{sy})}, \dots, q_{(\frac{i}{sx}, \frac{j}{sy})}, \dots, q_{(\frac{i-\frac{G}{2}}{sx}, \frac{j+\frac{G}{2}}{sy})}, \dots, q_{(\frac{i+\frac{G}{2}}{sx}, \frac{j+\frac{G}{2}}{sy})})$$

(Equation 7).

What is considered a specific example with $sx = sy = 2$ and $G = 5$:

$$\begin{aligned} sm_{(i,j)} &= fsmooth(q_{(\frac{i-2}{2}, \frac{j-2}{2})}, \dots, q_{(\frac{i+2}{2}, \frac{j-2}{2})}, \dots, q_{(\frac{i}{2}, \frac{j}{2})}, \dots, \\ &\quad q_{(\frac{i-2}{2}, \frac{j+2}{2})}, \dots, q_{(\frac{i+2}{2}, \frac{j+2}{2})}) \\ &= fsmooth(q_{(\frac{i-1}{2}-1, \frac{j}{2}-1)}, \dots, q_{(\frac{i}{2}+1, \frac{j}{2}-1)}, \dots, q_{(\frac{i}{2}, \frac{j}{2})}, \dots, \\ &\quad q_{(\frac{i}{2}-1, \frac{j}{2}+1)}, \dots, q_{(\frac{i}{2}+1, \frac{j}{2}+1)}) \end{aligned}$$

10

It then follows for even i and even h that:

For odd i and odd j :

When one considers the dependents existing in the equations, then one obtains the following:

$$\begin{aligned}
 sm_{(i_e, j_e)} &= fsmooth_{ss} \left(q_{(\frac{i}{2}-1, \frac{j}{2}-1)}, q_{(\frac{i}{2}, \frac{j}{2}-1)}, q_{(\frac{i}{2}+1, \frac{j}{2}-1)}, q_{(\frac{i}{2}-1, \frac{j}{2})}, q_{(\frac{i}{2}, \frac{j}{2})}, q_{(\frac{i}{2}+1, \frac{j}{2})}, \right. \\
 &\quad \left. q_{(\frac{i}{2}-1, \frac{j}{2}+1)}, q_{(\frac{i}{2}, \frac{j}{2}+1)}, q_{(\frac{i}{2}+1, \frac{j}{2}+1)} \right) \\
 sm_{(i_o, j_e)} &= fsmooth_{sg} \left(q_{(\frac{i}{2}-1, \frac{j}{2}-1)}, q_{(\frac{i}{2}, \frac{j}{2}-1)}, q_{(\frac{i}{2}+1, \frac{j}{2}-1)}, q_{(\frac{i}{2}-1, \frac{j}{2})}, q_{(\frac{i}{2}, \frac{j}{2})}, q_{(\frac{i}{2}+1, \frac{j}{2})}, \right. \\
 &\quad \left. q_{(\frac{i}{2}-1, \frac{j}{2}+1)}, q_{(\frac{i}{2}, \frac{j}{2}+1)}, q_{(\frac{i}{2}+1, \frac{j}{2}+1)} \right) \\
 sm_{(i_e, j_o)} &= fsmooth_{su} \left(q_{(\frac{i}{2}-1, \frac{j}{2}-1)}, q_{(\frac{i}{2}, \frac{j}{2}-1)}, q_{(\frac{i}{2}+1, \frac{j}{2}-1)}, q_{(\frac{i}{2}-1, \frac{j}{2})}, q_{(\frac{i}{2}, \frac{j}{2})}, q_{(\frac{i}{2}+1, \frac{j}{2})}, \right. \\
 &\quad \left. q_{(\frac{i}{2}-1, \frac{j}{2}+1)}, q_{(\frac{i}{2}, \frac{j}{2}+1)}, q_{(\frac{i}{2}+1, \frac{j}{2}+1)} \right) \\
 sm_{(i_o, j_o)} &= fsmooth_{su} \left(q_{(\frac{i}{2}-1, \frac{j}{2}-1)}, q_{(\frac{i}{2}, \frac{j}{2}-1)}, q_{(\frac{i}{2}+1, \frac{j}{2}-1)}, q_{(\frac{i}{2}-1, \frac{j}{2})}, q_{(\frac{i}{2}, \frac{j}{2})}, q_{(\frac{i}{2}+1, \frac{j}{2})}, \right. \\
 &\quad \left. q_{(\frac{i}{2}-1, \frac{j}{2}+1)}, q_{(\frac{i}{2}, \frac{j}{2}+1)}, q_{(\frac{i}{2}+1, \frac{j}{2}+1)} \right)
 \end{aligned}$$

- One can then see that the equations for even and for odd (i,j) respectively
 5 contain the same elements.

Proceeding from a square having the edge length of two of target pixels to be calculated, whereby the left lower corner represents even i and even j , the following conclusions can be drawn:

- four target pixels can be determined from nine source elements or,
 10 respectively, nine source pixels.
- the four target pixels are in fact calculated from the same source pixels; the dependents, however, reside at different locations in the initial equations; a separate equation is obtained for each of the four pixels.

- In order to obtain the required quality of a target matrix having the size 5,
 15 a matrix having the size 3 suffices in the source region, i.e. the equations in the source region contain only 9 dependents instead of 25 in the target region.

- four target pixels can be calculated parallel (according to separate equations) from one source pixel (with surrounding). As a result thereof, the calculating outlay is in fact increased but the speed is also increased; the four target
 20 pixels are thereby calculated parallel and independently of one another. A

combination of specific, logical sub-operations is possible dependent on the equations.

- the intermediate image is no longer utilized for smoothing, this being $s_x * s_y$ (in our case $2 * 2 = 4$) times larger than the source image. Only one-fourth of the data set therefore need undergo the smoothing operation given smoothing scaling.
- the scaling is contained in the process; the data need be processed only once not twice as in the above-described, known methods.
- overall, the smoothing scaling in the source raster enables a faster implementation of the operations given the same quality as in the two-stage process.
- the relative gain as a result of the single-stage method for smoothing and scaling is all the greater the greater the scaling factor is.
- the described method enables the combination of all scaling and smoothing rules that can be described according to Equations 2, 3, 4 and 6.

This example can be generalized as follows:

- One proceeds from the smallest rectangle in the source region that can be directly imaged into the target region (only one pixel given whole-numbered scaling factors).
- The rectangle is drawn with the target pixels (target rectangle). The smoothing matrix having the edge length G in the target region is placed around each corner target pixel.
- The size of the source rectangle to be considered can be determined from the expanse.
- All target pixels in the target rectangle can be calculated from the source pixels in the source rectangle. Only the source matrix need be covered for the calculation. The pixels in the target rectangle can be determined parallel independently from one another.

The improvements that derive due to the smoothing of the image data in the raster of the source image shall be illustrated with reference to Figures 8 and 9.

- The basis is formed by a source image that is to be scaled by the factor 2 and then smoothed. A region 15 of 3×3 pixels is considered in the source image.

After the scaling with a factor 2, a region 16 of the intermediate image having the size of 6 x 6 pixels is obtained therefrom.

A smoothing with a filter window 17 having the size 5 x 5 is now to be implemented within the region 16. This 5 x 5 window can be accommodated four
 5 times in the region 16. Once as shown in Figure 9a and additionally as shown in Figures 9b, 9c and 9d. Each of the operations shown in Figures 9a through 9d can be computationally represented by a recognition matrix, whereby respectively one pixel value is determined per matrix. For example, the value of the pixel 18 is calculated from the position of the filter window 17 shown in Figure 9a.

10 Four smoothed target pixels 18, 19, 20 and 21 are obtained from the recognition matrices on which Figures 9a through 9d are based. This group of target pixels is referenced in common as 22 in Figure 9e.

The 3 x 3 source matrix 15 describes 512 possible pixel combinations. An
 15 intermediate matrix from which four target pixels then derive with a 5 x 5 smoothing can be determined for each of these combinations with a general scaling method (scaling factor 2). The scaling and the smoothing can be implemented in one step, since an unambiguous relationship between source matrix (central pixel with 8 surrounding pixels) and the target pixels (target matrix) exists. Each source pixel is thereby directly converted into four target pixels taking its surroundings into
 20 consideration.

Given a larger source matrix (for example, 5 x 5 pixels), a smoothing with a larger recognition matrix (for example, with a 9 x 9 matrix) is possible given a scaling factor of 2 in order to again obtain four target pixels. The following equation describes this behavior for whole-numbered scaling factors s that are the same in x
 25 and y directions:

$$e = s * (q_M - 1) + 1 \quad (\text{Equation 8}),$$

whereby:

- q_M: size of the source matrix,
- e: size of the recognition matrix in the target raster, and
- 30 s: scaling factor.

Example of Scaling Factors that are not a Whole Number

An example of a scaling and smoothing procedure wherein equation 6 applies with $s_x = s_y = 2.5$ and $G = 5$, is described on the basis of Figures 10 through 13. A source pixel square 23 having the edge length 2 corresponding to the raster width $RW1 = 1/240$ inches (source raster, 240 dpi) prescribed by the raster lines 23' and 23'' is thereby imaged onto a target pixel square 24 having the edge length 5 corresponding to the raster width $RW2 = 1/600$ inches (target raster, 600 dpi) predetermined by the raster lines 24' and 24'' in the scaling.

A smoothing matrix (Figure 11) is placed around each of the 5×5 target pixels that lies within the 2×2 source pixel square 23. Taking the neighbors of the first order into consideration, the values for the 5×5 target pixels derive according to the above description from the group 25 of 4×4 source pixels, given $G = 5$.

Specific Exemplary Embodiment for Scaling Factors that are not a Whole Number

In the above-described method, $5 \times 5 = 25$ target pixels are generated from $4 \times 4 = 16$ source pixels. When this method is realized in software with a look-up table, then this table covers 65536 entries of 25 bits each. Due to the byte-by-byte operation of microprocessors, 65536×4 bytes = 262144 bytes are then occupied by the table. Such a large table can usually no longer be accommodated in the cache memory of standard microprocessors. The processing of the data can therefore ensue only relatively slowly. In order to increase the processing speed, respectively smaller groups of source pixels are processed in common in an improved procedure, whereby respectively 3×3 target pixels are dependent on only respectively 3×3 source pixels. The above-described work step is thereby divided into four sub-steps. A table is employed for each step, 9 target pixels being produced from 9 source pixels therewith. To that end, 4×512 entries of 9 bits each or, respectively, a table size of 4096 bytes is required. Compared to the aforementioned 262144 bytes, this is a memory reduction by the factor 64. The 3×3 target pixels generated in this way are then placed on top of one another in the form of an OR-operation.

Figures 12 and 13 illustrate this procedure: in Figure 12, four source pixels 2-2, 2-3, 3-2 or, respectively, 3-3 are shown with their respective surrounding source pixels, i.e. source pixel windows 52a, 52b, 52c, 52d. The source pixels are present in

a 240 dpi raster. A respective 3 x 3 target pixel square (matrix) 26, 27, 28 or, respectively, 29 are to be respectively formed from the source pixel 2-2, 2-3, 3-2 and 3-3, for example the target pixel square 26 for source pixel 2-2, the target pixel square 27 for source pixel 2-3, etc. The target pixel squares 26, 27, 28, 29 are then placed on top of one another such that the lines 31, 31', 31'' and 31''' respectively align with one another, as do the lines 32, 32', 32'' and 32''''. Due to this overlay, the same source pixels (1-2, 1-3; 2-1..2-4; 3-1..3-4; 4-2, 4-3) of the source pixel windows 52a...52d lie congruently on top of one another. Further, the 5 x 5 target pixel square 30 of Figure 13 corresponding to the higher 600 dpi resolution derives as a result thereof. With reference to the source pixels 2-2, 2-3, 3-2 and 3-3 to be converted, the conversion thereby ensues by individual pixels and image line by image line according to the following rules:

In the first image line and all following lines having an odd-numbered line number, the first and all following odd-numbered source pixels are converted according to the source pixel window 52a (forming a respective target pixel matrix of the type 26); the second and all following even-numbered source pixels of these lines are converted according to source pixel window 52b (forming a respective target pixel matrix of the type 27). In the second image line and all following lines having an even-numbered line number, the first and all odd-numbered successor source pixels are respectively converted according to the source pixel window 52c into a target pixel matrix of the type 28, and the even-numbered source pixels are converted according to the source pixel window 52d into a target pixel matrix of the type 29.

The division into four steps that has just been described is possible when the respectively 3 x 3 target pixel squares (matrices 26, 27, 28, 29 in Figure 12) are dependent only on the respective 3 x 3 source pixel windows 52a, 52b, 52c, 52d. This is prescribed by the scaling method employed and is also established in many scaling methods. The pixels placed on top of one another with an OR-operation are the same.

As an alternative to the described, symmetrical definition and joining by insertion into one another (overlapping) of the source pixels, an asymmetrical definition and joining is also possible according to Figures 22 and 23. For example, a 3 x 3 target pixel square 53 is thereby formed from the source pixel 2-2, a 2 x 3 target

pixel square 54 is formed from the source pixel 2-3, a 3 x 2 target pixel square 55 is formed from the source pixel 3-2, and a 2 x 2 target pixel square 56 is formed from the source pixel 3-3. The target pixel rectangles or, respectively, squares 53, 54, 55 and 56 (target image matrices) formed as a result thereof are then joined as target
 5 image without overlap. The other method steps cited in the symmetrical processing (for example, register entry, index formation, line-by-line procedure) are thereby identically implemented.

The above-described versions for forming the target pixel squares can be advantageous for specific implementations. Of course, the same principles can also
 10 be applied to other values of s_x , s_y and G .

Byte-by-Byte Processing of the Source Pixels for Conversion of the Two-Dimensional Problem into a One-Dimensional Problem

The method that has been presented converts rectangles of source pixels into rectangles of target pixels. Given a digital data processing realized in hardware,
 15 software or firmware, a byte-oriented procedure can generally be imaged better onto the functioning of the electronic components than a bite-oriented procedure. Source pixels are generally present as source image in a memory area that is organized in rows byte-oriented. A stored row thereby corresponds to an image line (scan line).

A byte-oriented procedure with which the source pixels are one-
 20 dimensionally processed with the assistance of a shift register is illustrated on the basis of Figures 15 through 18. To that end, the source pixels are entered into the shift register according to specific conventions, as shown in Figure 16. This can happen directly in hardware in that the individual lines are transferred to the corresponding locations in the register. Given a realization in software, a look-up
 25 table is employed for performance reasons. This table is constructed according to Figure 17. Upon entry into the register, the upper scan line is directly copied into the register after conversion, the next scan line is shifted one pixel position toward the left after conversion and is then entered into the register, the third scan line is entered into the register shifted by two positions toward the left after conversion (Figure 18).

This procedure sequences in detail as follows: Figure 15a shows an
 30 excerpt 33, the three stripes 35, 35' and 35'' of the source image that are respectively 8

pixels wide and lie above one another and are limited by the lines 34 and 34'. The respectively last pixel of the proceeding 8 pixels are shown at the left next to this and the respectively first pixel of the next 8 pixels are also shown to the right thereof. A 3 x 3 recognition window 36 is shifted across this structure from left to right. The sequence of the Figures 15a, 15b, 15c and 15d illustrates this for the first four shift events.

The shift effect is achieved by specific entry into the register 37 and by shifting three positions toward the right, as illustrated in Figure 16 with the processing step 45. The eight values (1 byte) lying side-by-side in an image line are thereby respectively entered such into the register 37 from right to left that neighboring line values in the register are respectively distanced three spaces from one another.

When in the illustration "Pxy", x and y respectively indicate the index in x or, respectively, y direction and "Rn" indicates the nth position in the register 37, then, for example, the values of the pixels P11, P15 and P18 (image line 36) are stored at the positions R1, R13 and R22 in the register 37. The respectively first values P21 and P31 of the following image lines 34 and 35, in contrast, lie directly next to the value of P11 at the positions R2 and R3 in the register. What is thereby achieved is that the two-dimensional pixel values of the image can be entered byte-by-byte and line-by-line into the one-dimensional register, and that the values are available for read out column-by-column in the register. An imaging of the two-dimensional values of the image thus ensues into the one-dimensional register 37.

The 3 x 3 = 9 pixels of the window 36' yield the index for the combined scaling/smoothing table. This index can be directly taken from the register 37 as the value formed from the region 38 (the nine right-hand, neighboring bits of the register 37). The bits of this value correspond to the recognition window and yield the smoothed target pixels.

The corresponding indices for the remaining seven bits of an image line (35, 35' or 35'') are subsequently obtained by respective shifting of the register values three places toward the right. This shift event then corresponds to the shifting of the recognition 36 in the sequence of Figures 15a through 15d.

The index data can be constructed once for each block of 3 bytes source data in a register. The determination of the indices for the scaling/smoothing matrices of an image line can then be optimized even more. The structure of the index register from the respective byte, namely, can then be realized in only one step via a table that has the properties schematically shown in Figure 17.

The lines 39 respectively connect the left edge of a source 40 to the register position 41 appertaining thereto. For the two lower bytes of the source, the conversion table is then simply shifted one pixel (the middle pixel) or two pixels (the lower byte) toward the left and is ordered onto the index register. This conversion table is referred to below as index table.

Figure 18 again illustrates the entire procedure for smoothing and scaling the source image data based on a byte-by-byte processing and programmed in software. The 30-bit register 37 is filled (whereby, of course, a 32 bit register can also be employed) via the look-up table from respectively three bytes input image data 42 in the excerpt 33 of the source image. When storing the second or, respectively, third byte into the register 37, a respective shift by one position is undertaken in the processing step 44 ($\ll 1$, $\ll 2$). Register locations that have already been written with the preceding byte are overwritten with the following data with an OR-operation. The lower 9 bytes 45 of the register 37 yield an index for the scaling/smoothing table 46 from which the scaled and smoothed target pixels 47 can be directly taken. These are then deposited in the target region. Subsequently, the next 3-byte block in the source region is processed. This procedure is repeated moving across the entire source image. Pixels that have not been set are assumed at the edges for the edge pixels that are not present.

Generalization of the Byte-by-Byte Offering of the Source Pixels

The above example was based on a quadratic smoothing window with $Q_x = Q_y = 3$ and on binary pixel data. Expressed generally, however, a square of target pixels is to be determined from a rectangle of source pixels in the procedure of smoothing and scaling.

Proceeding from a source pixel rectangle 48 having the width Q_x in x-direction and the width Q_y in y-direction shown in Figure 19, a shift register having the size

$$B = Q_y \times W \times \left(\left\lfloor \frac{8n}{W} \right\rfloor - 1 + Q_x \right)$$

- 5 is required. $8n/W$ must thereby be a whole number. The shift register is filled according to the following equation in each step with respectively n bytes of each scan line (line) in the source pixel rectangle:

$$R_{(i+A)} = q(i/Q_y, Q_y - 1 - (i \% Q_y)) \quad (\text{Equation 9}),$$

whereby the following apply:

- 10 R_i : value of the i^{th} register bit
 $q(k, l)$: value of the source pixel with the position (k, l)
 $/$: integer division
 $\%$: modulo division
 $A = W \times (Q_y \times Q_x - 1)$
- 15 n : plurality of bytes read in per line
 W : value of a pixel, i.e. bits per pixel (binary, gray scale value, color value),
 and
 B : width of the shift register in bits
- As an alternative to the rule according to Equation 9, the rule
- 20 $R_{(i+A)} = q(i/Q_y, i \% Q_y) \quad (\text{Equation 9a})$
- can also be employed.

When the shift register is pre-occupied according to Equation 9 or 9a, then the lower $W \times Q_x \times Q_y$ bits 49 contain the desired source window in one-dimensional presentation (called index bits below).

- 25 By shifting Q_y pixels ($W \times Q_y$ bits) toward the right, the index bits 49 for the next source window are obtained. This procedure is implemented $8n/W$ times ($8n/W$ must be whole number and respectively n bytes were read in per source line); the filling of the register with the next source bytes follows thereafter.

- Figure 20 shows a corresponding realization in hardware. The
- 30 respectively obtained index bits 49 form the input signals for a logic circuit 50 for calculating the target pixels.

Figure 21 schematically shows a conversion in the form of software. The index bits 49 here serve as index for addressing a look-up table 51 that contains the previously calculated pixels for this combination.

Processing Gray Scale/Color Data

5 The processing of grayscale of color pixels ensues according to the same principle as with binary data. All boxes in the illustrated figures then represent one pixel that contains W bits per pixel instead of one bit per pixel given binary data. The index formation as well as the equations for the combination of scaling and smoothing all refer to pixels; the only thing changed is the plurality of bits per pixel. The scaling/smoothing table then contains grayscale or, respectively, color values instead of bits per pixel. In Figure 18, the shift values onto the index register ($\ll 1$, $\ll 2$) indicate pixel positions; expressed in bits, this is ($\ll 1 \times W$, $\ll 2 \times W$) bits. In the same way as for binary data, the method can thus also be used for the processing of data having W bits per pixel in order to convert data of a first raster into a second that is finer (scaling up).

Increasing the Gray/Color Steps

Up to now, applications have been described that convert data of a first resolution into data of a second resolution, whereby the second resolution is finer than the first and the plurality of gray/color steps remains the same. The disclosed method, however, can also be used for an increase in the gray/color steps (only referred to below as gray scales). The basis is formed by a scaling factor S, the source data are present with W_q bits per pixel and the target data are to be produced with W_z bits per pixel.

Overall, S^2 target pixels with $2^{W_z} - 1$ variation possibilities are required at the end. According to the previous method, S^2 target pixels would be obtained with $2^{W_q} - 1$ variation possibilities. We achieve the expanded variation possibilities in that scaling is carried out with a new, higher scaling factor S_r . For the sake of simplicity, this is usually a whole number. The following inequation is to be solved for this purpose:

$$Sr^2 * (2^{Wq} - 1) \geq S^2 * (2^{Wz} - 1)$$

$$Sr^2 \geq S^2 * \frac{2^{Wz} - 1}{2^{Wq} - 1}$$

$$Sr \geq S * \sqrt{\frac{2^{Wz} - 1}{2^{Wq} - 1}}$$

The additional pixels in the target region that derive due to the higher scaling factor are then converted into the required gray scales.

Wq bits per pixel of the source data

Wz bits per pixel of the target data

5 S scaling factor

Sr resulting aggregate scaling factor

This is to be presented by way of example on the basis of a conversion of binary 300 dpi data into 300 dpi data having 2 bits per pixel. Only the gray scales, not the resolution are enhanced here. The following applies:

$$Wq = 1$$

$$Wz = 2$$

$$S = 1$$

$$Sr \geq 1 * \sqrt{\frac{2^2 - 1}{2^1 - 1}} = \sqrt{\frac{4 - 1}{2 - 1}} = \sqrt{\frac{3}{1}} = \sqrt{3}$$

10 For example, Sr = 2 is selected.

Scaling factor 2, we obtain 4 target pixels for a source pixel. The four acquired pixels have values between b0000 and b1111, whereby the preceding b indicates binary notation. These pixels are now converted into gray scales, whereby the plurality of black pixels (for example, having pixel value 1) is summed up and converted into a grayscale value. The conversion need not ensue linearly, it can also be based on the (non-) linearity of the output unit. The conversion ensues with a table, for example

15

Pixel Value	Grayscale Value
-------------	-----------------

	No black pixel	
	b0000	b00
	one black pixel	
	b0001	b01
5	b0010	b01
	b0100	b01
	b1000	b01
	two black pixels	
	b0011	b10
10	b0101	b10
	b1001	b10
	b0110	b10
	b1010	b10
	b1100	b10
15	three black pixels	
	b0111	b11
	b1011	b11
	b1101	b11
	b1110	b11
20	four black pixels	
	b1111	b11

Given a size of the smoothing window of $G = 5$ in the target region, $Q_x = Q_y = 3$ in the source region, the scaling/smoothing table 46 in Figure 16 then has 512 entries with a respective pixel each that is composed of two bits. Since the conversion into gray scales is already worked into the scaling/smoothing table, this does not cause any performance loss.

Use of the Variability with Respect to the Scaling and Smoothing Algorithms Employed

Various combinations of scaling and smoothing can be realized by simple replacement of the content of the scaling/smoothing table without having to influence the rest of the apparatus, regardless of whether implemented in hardware or software.

This enables specific scaling and smoothing methods to be prescribed, for example in print data, whereby it is not fixed in advance as to what resolution the printout should occur with. Prescribing the method for a specific source image can ensue in that the optimum methods can be selected, for example, from a set of continuously numbered standard methods for the source data via two additional parameters. Alternatively, the equations of the methods can be handed over in encoded form. The form of the encoding is thereby freely selectable. When, for example, in a printing system, input data having various resolutions are to be processed (different scaling factors), a respectively separate device is required for this purpose.

10 **Generalization of the "Smoothing"**

Particularly when processing color data, there are algorithms for filterings that, just like the smoothing algorithms, shift a window (square) having an odd-numbered edge length G across the target pixels and redefine the central pixel from the surrounding pixels. When this procedure is connected with a scaling, then it can be implemented in the source region exactly like the method described here; the scaling/smoothing table would then, for example, represent a scaling/filtering table.

The invention was specifically described for employment in a printer that converts the image data from a first raster into a second raster upon retention or enhancement of the gray scales or, respectively, color values. Only an enhancement of gray scales/color steps in the same raster is also possible. It is thereby clear that the image data can also be edited such within a computer that they are available in a resolution adapted to the printer. Particularly in a network wherein print jobs from various computers are sent to a central printer, this will generally be the case. The conversion can thereby ensue both in the sending computer as well as in an intervening computer that administers the print jobs.

List of Reference Characters

	1	source image
	1-1, 1-2, 1-3, 1-4	source pixels
	2-1, 2-2, 2-3, 2-4	source pixels
5	3-1, 3-2, 3-3, 3-4	source pixels
	4-1, 4-2, 4-3, 4-4	source pixels
	2	scaling procedure
	3	intermediate image
	4	smoothing procedure
10	5	target image
	6	coordinate system for source or, respectively, target raster
	7	pixels in the source region
	7'	source block
	8	pixels in the target region
15	8'	target block
	9	source squares
	10	target squares
	11	white corner pixel
	12	black corner pixel
20	13	edge pixel
	14	image excerpt
	15	source image region
	16	intermediate image region
	17	filter window
25	18	first target pixel
	19	second target pixel
	20	third target pixel
	21	fourth target pixel
	22	target pixel group
30	23	source pixel square
	23', 23''	raster line

	24	target pixel square
	24', 24''	raster line
	25	group of source pixels
	26	first 3 x 3 source pixel square
5	27	second 3 x 3 source pixel square
	28	third 3 x 3 source pixel square
	29	fourth 3 x 3 source pixel square
	30	5 x 5 target pixel square
	31, 31', 31'', 31'''	first aligning lines
10	32, 32', 32'', 32'''	second aligning lines
	33	image excerpt
	34, 34'	boundary of the image excerpt
	35, 35', 35''	image stripes
	36, 36'	recognition window
15	37	shift register
	38	shift register region
	39	allocation lines
	40	image source
	41	register position
20	42	source image data
	43	index table
	44	processing step for shifting
	45	9 pixels read out
	46	scaling/smoothing table
25	47	target image data
	48	source pixel rectangle
	49	index bits
	50	logic circuit
	51	look-up table
30	52a..52d	source pixel window
	53	target pixel square

54	target pixel rectangle
55	target pixel rectangle
56	target pixel square

Patent Claims

1. Method for converting digital source data referring to source pixels in the raster of a first resolution into digital target data in the raster of a second resolution, whereby
- 5 (a) the data are scaled by at least one scaling factor (s_x, s_y),
(b) each source datum (1, 7, 7', 23, 33, 42) has a target image matrix (26, 27, 28, 29, 53, 54, 55, 56) allocated to it on the basis of a surround window (52a, 52b, 52c, 52d) surrounding the source pixel and the target data are determined from neighboring target image matrices (26, 27, 28, 29, 53, 54, 55, 56) such that each target pixel is directly formed from a source pixel taking the surroundings thereof into consideration,
10 (c) each source datum is employed for smoothing the target data to be determined from all neighboring source data,
and
15 (d) the scaling and the smoothing are implemented such in a common processing step that
(d1) the target data are smoothed in the raster (23', 23'') of the source data (1, 7, 7', 23, 33, 42).
2. Method according to claim 1, whereby neighboring target image matrices
20 (26, 27, 28, 29, 53, 54, 55, 56) are superimposed on one another for determining the target data or are joined without overlap.
3. Method for converting digital source data in the raster of a first resolution into digital target data in the raster of a second resolution, whereby
- 25 (a) the data are scaled by a scaling factor (s_x, s_y) and are smoothed,
(b1) a scaling rule is prescribed from a plurality of selectable scaling rules,
(b2) a smoothing rule is prescribed from a plurality of smoothing rules,
(c) a single scaling and smoothing rule is formed from the selected
30 scaling rule and the selected smoothing rule, both a smoothing of the target data in the raster (23', 23'') of the source data (1, 7, 7', 23, 33, 42) as well as a scaling ensuing in

respectively one processing step with said single scaling and smoothing rule during the formation of the target data,

- 5 (c1) each source datum (1, 7, 7', 23, 33, 42) has a target image matrix (26, 27, 28, 29, 53, 54, 55, 56) allocated to it on the basis of a surround window (52a, 52b, 52c, 52d) surrounding the source pixel and the target data are determined from neighboring target image matrices (26, 27, 28, 29, 53, 54, 55, 56) such that each target pixel is directly formed from a source pixel taking the surroundings thereof into consideration,
- 10 (d) each source datum is employed for smoothing the target data to be determined from all neighboring source data.
4. Method according to claim 3, whereby the scaling rule is prescribed from a plurality of scaling rules.
5. Method according to claim 3 or claim 4, whereby the smoothing rule is
15 prescribed from a plurality of smoothing rules.
6. Method according to one of the claims 4 or 5, whereby the prescription of the scaling rule and/or of the smoothing rule ensues on the basis of a print job.
7. Method according to claim 6, whereby different smoothing rules are employed region-by-region within the print job.
- 20 8. Method according to one of the claims 1 through 7, whereby the scaling factor (s_x, s_y) has a fractional value.
9. Method according to one of the claims 1 through 8, whereby the scaling and the smoothing ensue in a common work step.
10. Method according to one of the preceding claims, whereby the scaling and
25 smoothing ensue in that a respective index (49) allocated to the target image matrix (26, 27, 28, 29, 53, 54, 55, 56) is generated from the source data (1, 7, 7', 23, 42) individually pixel-by-pixel, the target data (8, 10, 24, 30, 47) being determined with said index.
11. Method according to claim 10, characterized in that the index (49) is
30 employed for addressing a look-up table (51) that contains the target data.

12. Method according to claim 10, whereby the index (49) is employed in the form of an index signal for driving an electronic circuit (51) that forms the target data (8, 10, 24, 30, 47) from the index signals.

13. Method according to one of the claims 10 through 12, whereby the source data (33) are stored byte-by-byte in a shift register (37), whereby an interrelated group of data (36, 36') are respectively shifted in the shift register (37) with each processing clock, as a result whereof the index (49) is formed from bits of the shift register (37) lying next to one another after the shifting of all data of the group.

14. Method according to one of the preceding claims, whereby the shift register (37) is filled according to the following rules with every processing clock:

(a) R_0 through $R_{(A-1)}$ remain unaffected and

(b) $R_{(i+A)} = q(i/Q_y, Q_y - 1 - (i \% Q_y))$ and

$R_{(i+A)} = q(i/Q_y, i \% Q_y)$,

whereby the following applies:

15 R_i : value of the i^{th} register bit

Q_x : window width in x-direction

Q_y : window width in y-direction

$q(k, l)$: value of the source pixel having the position (k, l)

$/:$ integer division

20 $\%:$ modulo division and

$A = Q_y * (Q_x - 1)$.

15. Method according to one of the preceding claims, whereby pixel data belonging to images are processed as source data (1, 7, 7', 23, 33, 42).

25 16. Method according to one of the preceding claims, whereby excerpts of the image having $l \times m$ source pixels are respectively processed in common as window; in that target image matrices each respectively having $n \times p$ target pixels are formed from each source pixel window; and in that the target pixels of neighboring target pixel matrices are deposited in a memory next to one another or overlapped.

30 17. Method according to claim 16, whereby neighboring target image matrices are overlapped with an OR-operation.

5

19.

20.

10

22.

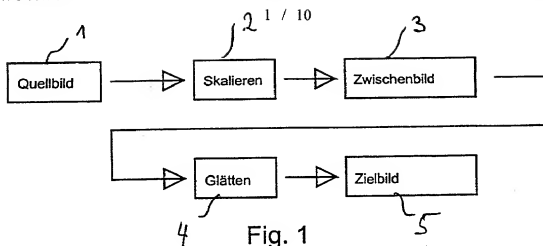


Fig. 1




Fig. 2a




Fig. 2b






Fig. 2c

Stand der Technik



Stand der Technik

Fig. 2d

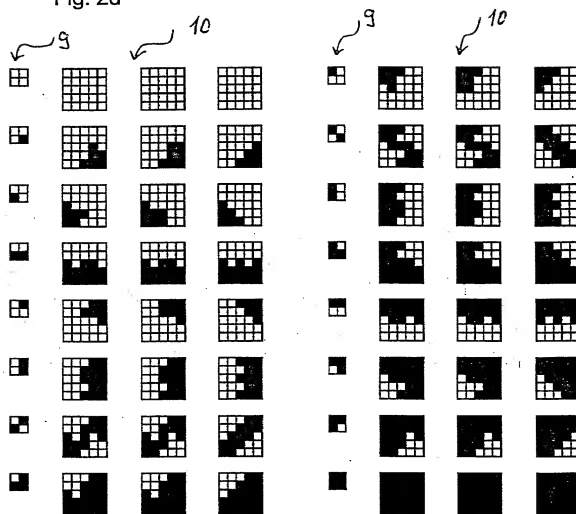

Stand der Technik

Fig. 3




Fig. 4




Fig. 5




Fig. 6a



Fig. 6b



Fig. 6c




Fig. 7

4 / 10




Fig. 8




Fig. 9a

Fig. 9b

Fig. 9c

Fig. 9d




Fig. 9e

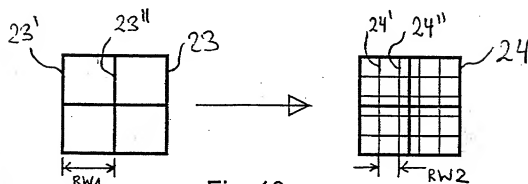


Fig. 10

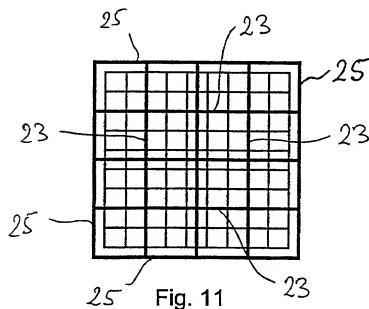


Fig. 11




Fig. 14




Fig. 15a




Fig. 15b




Fig. 15c




Fig. 15d

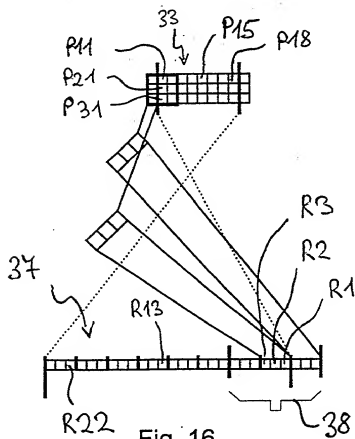


Fig. 16




Fig. 17

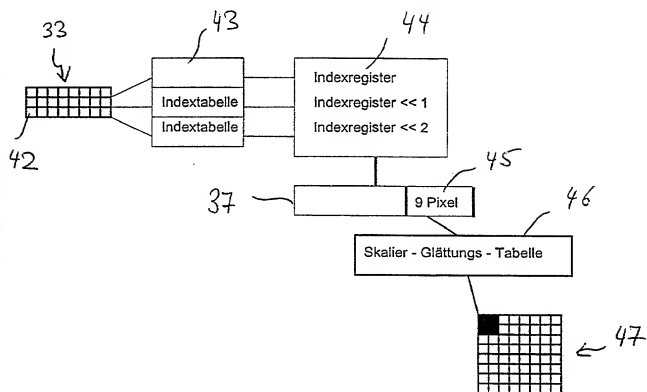


Fig. 18

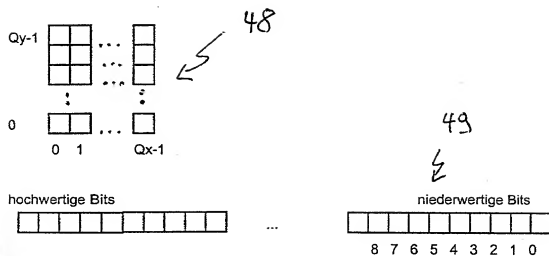


Fig. 19

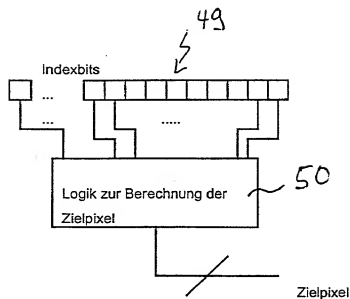


Fig. 20

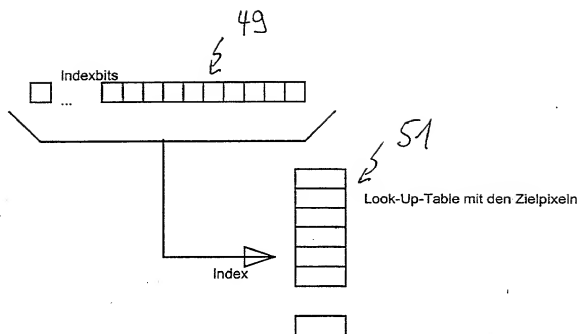


Fig. 21

[illegible]

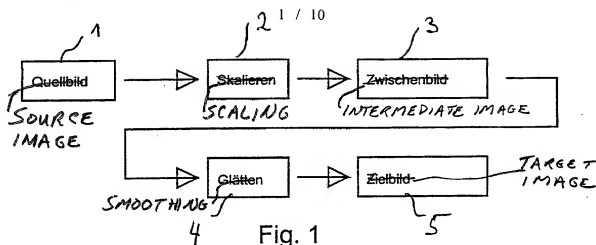


Fig. 1




Fig. 2a




Fig. 2b






Fig. 2c

PRIOR ART
Stand der Technik



PRIOR ART
~~Stand der Technik~~

Fig. 2d

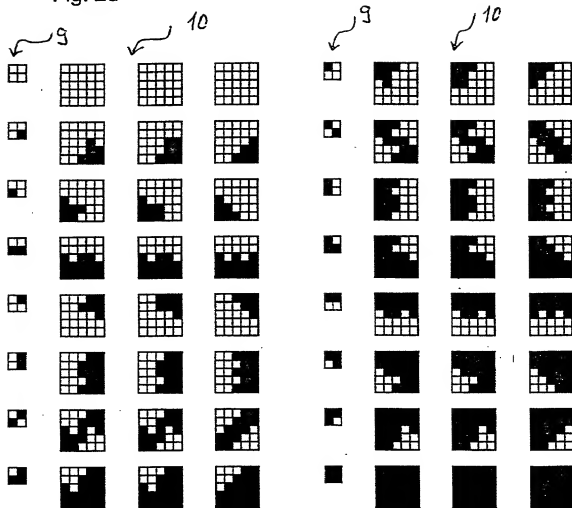

~~Stand der Technik~~

Fig. 3

Year	1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100
1994	1995	1996	1997	1998	1999	2000	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012	2013	2014	2015	2016	2017	2018	2019	2020	2021	2022	2023	2024	2025	2026	2027	2028	2029	2030	2031	2032	2033	2034	2035	2036	2037	2038	2039	2040	2041	2042	2043	2044	2045	2046	2047	2048	2049	2050	2051	2052	2053	2054	2055	2056	2057	2058	2059	2060	2061	2062	2063	2064	2065	2066	2067	2068	2069	2070	2071	2072	2073	2074	2075	2076	2077	2078	2079	2080	2081	2082	2083	2084	2085	2086	2087	2088	2089	2090	2091	2092	2093	2094	2095	2096	2097	2098	2099	2100	




Fig. 4




Fig. 5



Fig. 6a



Fig. 6b



Fig. 6c




Fig. 7




Fig. 8




Fig. 9a

Fig. 9b

Fig. 9c

Fig. 9d




Fig. 9e

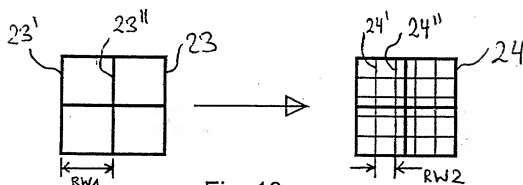


Fig. 10

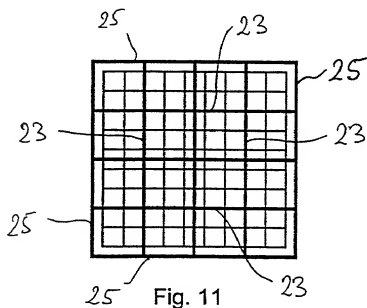


Fig. 11

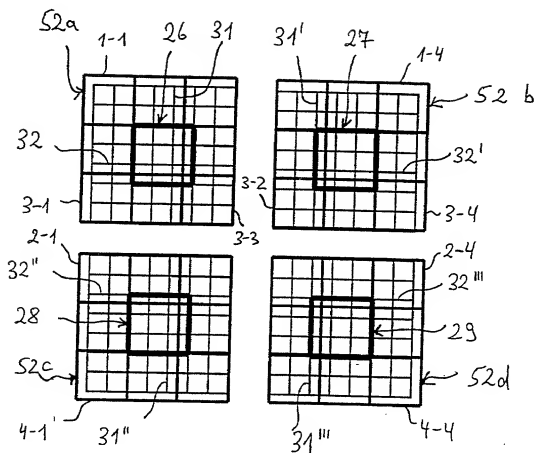


Fig. 12

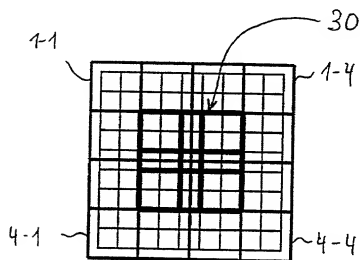


Fig. 13




Fig. 14




Fig. 15a




Fig. 15b




Fig. 15c




Fig. 15d

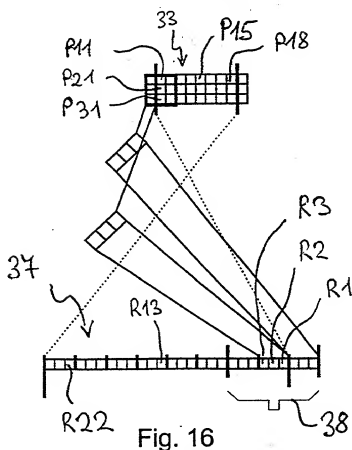


Fig. 16




Fig. 17

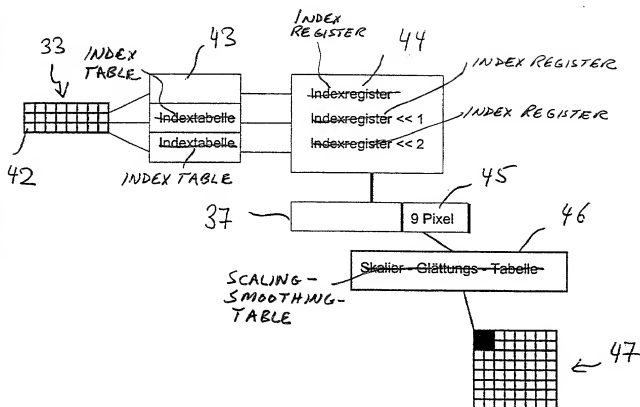


Fig. 18

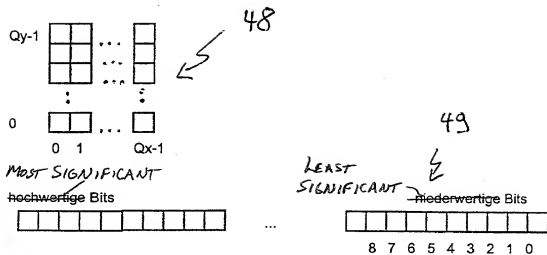


Fig. 19

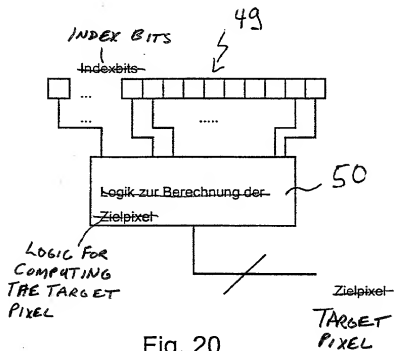


Fig. 20

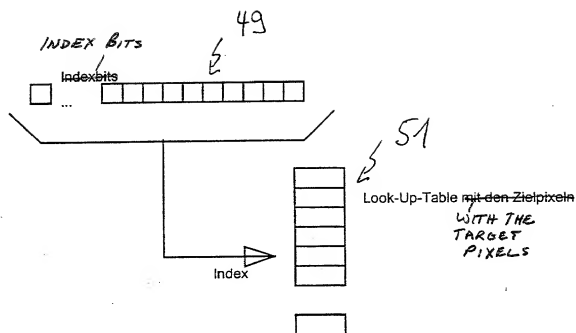


Fig. 21

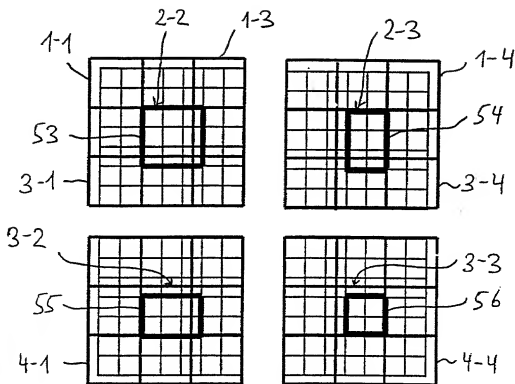


Fig. 22





Fig. 23

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION
ERKLÄRUNG FÜR PATENTANMELDUNGEN MIT VOLLMACHT
German Language Declaration


Als nachstehend benannter Erfinder erkläre ich hiermit
an Eides Statt:


dass mein Wohnsitz, meine Postanschrift, und meine
Staatsangehörigkeit den im Nachstehenden nach
meinem Namen aufgeführten Angaben entsprechen,

dass ich, nach bestem Wissen der ursprüngliche, erste
und alleinige Erfinder (falls nachstehend nur ein Name
angegeben ist) oder ein ursprünglicher, erster und
Miterfinder (falls nachstehend mehrere Namen
aufgeführt sind) des Gegenstandes bin, für des dieser
Antrag gestellt wird und für den ein Patent beantragt
wird für die Erfindung mit dem Titel:


(zutreffendes ankreuzen)

 hier beigefügt ist.

 am _____ als
PCT internationale Anmeldung
PCT Anmeldungsnummer _____
eingereicht wurde und am _____
abgeändert wurde (falls tatsächlich abgeändert).

 Ich bestätige hiermit, dass ich den Inhalt der obigen
Patentanmeldung einschliesslich der Ansprüche
durchgesehen und verstanden habe, die eventuell
durch einen Zusatzantrag wie oben erwähnt
abgeändert wurde.

Ich erkenne meine Pflicht zur Offenbarung
irgendwelcher Informationen, die für die Prüfung der
vorliegenden Anmeldung in Einklang mit Absatz 37,
Bundesgesetzbuch, Paragraph 1.56 von Wichtigkeit
sind, an.

Ich beanspruche hiermit ausländische Prioritätsvorteile
gemäss Abschnitt 35 der Zivilprozessordnung der
Vereinigten Staaten, Paragraph 119 aller unten
angegebenen Auslandsanmeldungen für ein Patent
oder eine Erfindersurkunde, und habe auch alle
Auslandsanmeldungen für ein Patent oder eine
Erfindersurkunde nachstehend gekennzeichnet, die ein
Anmeldedatum haben, das vor dem Anmeldedatum
der Anmeldung liegt, für die Priorität beansprucht wird.

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are
as stated below next to my name,

I believe I am the original, first and sole inventor (if only
one name is listed below) or an original, first and joint
inventor (if plural names are listed below) of the
subject matter which is claimed and for which a patent
is sought on the invention entitled

**METHOD FOR CONVERTING DIGITAL RASTER
DATA OF A FIRST RESOLUTION INTO DIGITAL
TARGET DATA OF A SECOND RESOLUTION**

the specification of which

(check one)

☐ is attached hereto

☒ was filed on 27 November 1998
as United States application Number or PCT
international application Number PCT/EP98/07689

and was amended on _____
(if applicable)

I hereby state that I have reviewed and understand the
contents of the above identified specification, including
the claims as amended by any amendment referred to
above.

I acknowledge the duty to disclose information which
is material to the examination of this application in
accordance with Title 37, Code of Federal Regulations,
§1.56.

I hereby claim foreign priority benefits under Title 35,
United States Code, §119 of any foreign application(s)
for patent or inventor's certificate listed below and have
also identified below any foreign application for patent
or inventor's certificate having a filing date before that
of the application on which priority is claimed:

German Language Declaration

Prior foreign applications
Priorität beansprucht

<u>197 52 927.5</u>	<u>Germany</u>	<u>28 November 1997</u>
(Number)	(Country)	(Day Month Year Filed)
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)
<hr/>		
(Number)	(Country)	(Day Month Year Filed)
(Number)	(Land)	(Tag Monat Jahr eingereicht)
<hr/>		
(Number)	(Country)	(Day Month Year Filed)
(Nummer)	(Land)	(Tag Monat Jahr eingereicht)

Priority Claimed

<input checked="" type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein
<input type="checkbox"/>	<input type="checkbox"/>
Yes	No
Ja	Nein

Ich beanspruche hiermit gemäss Absatz 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 120, den Vorzug aller unten aufgeführten Anmeldungen und falls der Gegenstand aus jedem Anspruch dieser Anmeldung nicht in einer früheren amerikanischen Patentanmeldung laut dem ersten Paragraphen des Absatzes 35 der Zivilprozessordnung der Vereinigten Staaten, Paragraph 122 offenbart ist, erkenne ich gemäss Absatz 37, Bundesgesetzbuch, Paragraph 1.56 meine Pflicht zur Offenbarung von Informationen an, die zwischen dem Anmeldedatum der früheren Anmeldung und dem nationalen oder PCT internationalen Anmeldedatum dieser Anmeldung bekannt geworden sind.

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §122 I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date)
(Anmeldedatum)

(Status)
(patentiert, anhängig,
aufgegeben)

(Status)
(patented, pending,
abandoned)

(Application Serial No.)
(Anmeldeseriennummer)

(Filing Date)
(Anmeldedatum)

(Status)
(patentiert, anhängig,
aufgegeben)

(Status)
(patented, pending,
abandoned)

Ich erkläre hiermit, dass alle von mir in der vorliegenden Erklärung gemachten Angaben nach meinem besten Wissen und Gewissen der vollen Wahrheit entsprechen, und dass ich diese eidesstattliche Erklärung in Kenntnis dessen abgebe, dass wissentlich und vorsätzlich falsche Angaben gemäss Paragraph 1001, Absatz 18 der Zivilprozessordnung der Vereinigten Staaten von Amerika mit Geldstrafe belegt und/oder Gefängnis bestraft werden können, und dass derartig wissentlich und vorsätzlich falsche Angaben die Gültigkeit der vorliegenden Patentanmeldung oder eines darauf erteilten Patentes gefährden können.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

German Language Declaration

VERTRETUNGSVOLLMACHT: Als benannter Erfinder beauftrage ich hiermit den nachstehend benannten Patentanwalt (oder die nachstehend benannten Patentanwälte) und/oder Patent-Agenten mit der Verfolgung der vorliegenden Patentanmeldung sowie mit der Abwicklung aller damit verbundenen Geschäfte vor dem Patent- und Warenzeichenamt: (Name und Registrationsnummer anführen)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

And I hereby appoint Messrs. John D. Simpson (Registration No. 19,842), Dennis A. Gross (24,410), Robert M. Barrett (30,142), Steven H. Noll (28,982), Kevin W. Guynn (29,927), Robert M. Ward (26,517), Brett A. Valiquet (27,841), Edward A. Lehman (22,312), David R. Metzger (32,919), Todd S. Parkhurst (26,494), James D. Hobart (24,149), Melvin A. Robinson (31,870), Joseph P. Reagan (35,332), Michael R. Hull (35,902), Michael S. Leonard (37,557), William E. Vaughan (39,056) and Lewis T. Steadman (17,074), all members of the firm of Hill & Simpson, A Professional Corporation

Telefongespräche bitte richten an:
(Name und Telefonnummer)

Direct Telephone Calls to: (name and telephone number)

312/876-0200
Ext.

Postanschrift:

Send Correspondence to:

HILL & SIMPSON
A Professional Corporation
85th Floor Sears Tower, Chicago, Illinois 60606

Voller Name des einzigen oder ursprünglichen Erfinders: <i>1-00</i>		Full name of sole or first inventor: <u>ANDREAS HIRN</u>	
Unterschrift des Erfinders	Datum	Inventor's signature <i>[Signature]</i>	Date
Wohnsitz		Residence <u>85652 Plening</u> <u>Germany</u> <i>DEX</i>	
Staatsangehörigkeit		Citizenship <u>Germany</u>	
Postanschrift		Post Office Address <u>Mitterweg 5</u>	
		85652 Plening Germany	